
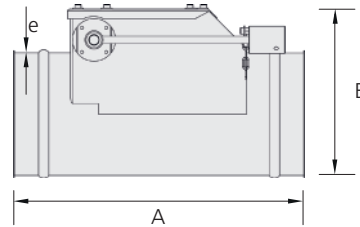


Compuerta antirretorno
 Non-return damper
 Clapet anti-retour

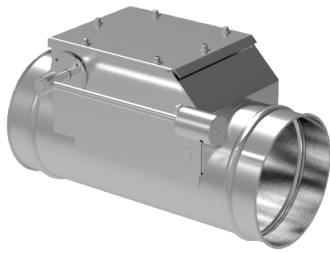

D int.	A	B	e	Kg	galvanizado	inoxidable 304
					galvanized	stainless steel 304
					galvanisé	inoxydable 304
					Ref.	Ref.
120	420	214	1,5	4,5	12110660	12120660
140	420	214	1,5	4,5	14110660	14120660
150	430	224	1,5	5,0	15110660	15120660
160	440	234	1,5	5,5	16110660	16120660
175	460	254	1,5	6,5	17110660	17120660
200	480	273	1,5	8,0	20110660	20120660
225	500	293	1,5	9,0	22110660	22120660
250	520	313	1,5	10,0	25110660	25120660
275	560	353	1,5	13,0	27110660	27120660
300	580	374	2,0	16,0	30110660	30120660
315	600	394	2,0	18,0	31110660	31120660
325	600	394	2,0	18,0	32110660	32120660
350	630	424	2,0	20,0	35110660	35120660
400	680	474	2,0	24,5	40110660	40120660
450	730	524	2,0	29,0	45110660	45120660
500	780	575	3,0	48,0	50210660	50220660
550	830	625	3,0	55,5	55210660	55220660
600	880	675	3,0	68,0	60210660	60220660

6

Info:

Compuerta antirretorno con palanca con contrapeso ajustable.
 Montaje horizontal.
 Velocidad máxima del aire: 35 m/s.

Non-return damper with adjustable counterweight lever.
 To be mounted horizontally.
 Maximum air speed: 35 m/s.

Clapet anti-retour avec levier à contrepoids réglable.
 À monter horizontalement.
 Vitesse maximale de l'air: 35 m/s.