


Pletina "ROS"
"ROS" Flange
Bride "ROS"

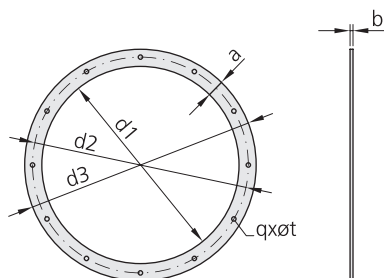

DN	d1	d2	d3	axb		qxøt	Kg		galvanizado	inoxidable 304
				galva	inox		galva	inox	galvanized	stainless steel 304
									galvanisé	inoxydable 304
									Ref.	Ref.
80	83	113	133	25x4	25x4	4x7	0,26	0,27	08410596	08420596
100	103	133	153	25x4	25x4	4x7	0,31	0,32	10410596	10420596
110	113	143	163	25x4	25x4	4x7	0,34	0,34	11410596	11420596
120	123	153	173	25x4	25x4	5x7	0,36	0,37	12410596	12420596
125	128	158	178	25x4	25x4	5x7	0,37	0,38	21410596	21420596
130	133	163	183	25x4	25x4	5x7	0,38	0,39	13410596	13420596
140	143	173	193	25x4	25x4	5x7	0,41	0,42	14410596	14420596
150	153	183	203	25x4	25x4	5x7	0,43	0,44	15410596	15420596
160	163	193	213	25x4	25x4	6x7	0,46	0,47	16410596	16420596
175	178	208	228	25x4	25x4	6x7	0,49	0,50	17410596	17420596
200	203	239	263	30x4	30x4	6x9	0,68	0,69	20410596	20420596
225	228	264	288	30x4	30x4	8x9	0,75	0,76	22410596	22420596
250	253	289	313	30x4	30x4	8x9	0,82	0,84	25410596	25420596
275	278	314	338	30x4	30x4	8x9	0,90	0,91	27410596	27420596
300	303	339	363	30x4	30x4	10x9	0,97	0,98	30410596	30420596
315	318	354	378	30x6	30x5	10x9	1,52	1,29	31610596	31520596
325	328	364	388	30x6	30x5	10x9	1,56	1,32	32610596	32520596
350	353	389	413	30x6	30x5	12x9	1,67	1,41	35610596	35520596
400	403	441	473	35x6	35x5	12x9	2,24	1,90	40610596	40520596
450	453	491	523	35x6	35x5	14x9	2,49	2,11	45610596	45520596
500	503	541	573	35x6	35x5	14x9	2,75	2,33	50610596	50520596
550	553	591	623	35x6	35x5	16x9	3,00	2,55	55610596	55520596
600	603	641	673	35x6	35x5	18x9	3,26	2,76	60610596	60520596
650	653	691	723	35x6	35x5	18x9	3,52	2,98	65610596	65520596
700	703	741	773	35x6	35x5	20x9	3,77	3,20	70610596	70520596
750	753	791	824	35x6	35x5	20x9	4,04	3,42	75610596	75520596
800	803	841	874	35x6	35x5	22x9	4,29	3,63	80610596	80520596
850	853	891	924	35x6	35x5	22x9	4,55	3,85	85610596	85520596
900	903	941	974	35x6	35x5	24x9	4,80	4,07	90610596	90520596
950	953	991	1024	35x6	35x5	24x9	5,06	4,29	95610596	95520596
1000	1003	1041	1074	35x6	35x5	26x9	5,32	4,50	99610596	99520596

Nota: | Note:
 Para pletinas "ROS" acopladas, sustituir los 3 últimos dígitos de la referencia por 597.
 For coupled "ROS" flange, replace the last 3 digits of the reference with 597.
 Pour brides "ROS" couplée, remplacer les 3 derniers chiffres de la référence par 597.
 Ex.: xxxxx597